
JEN Alternative plugs IRIDAM

TECHNICAL DATA SHEET

JP7IR

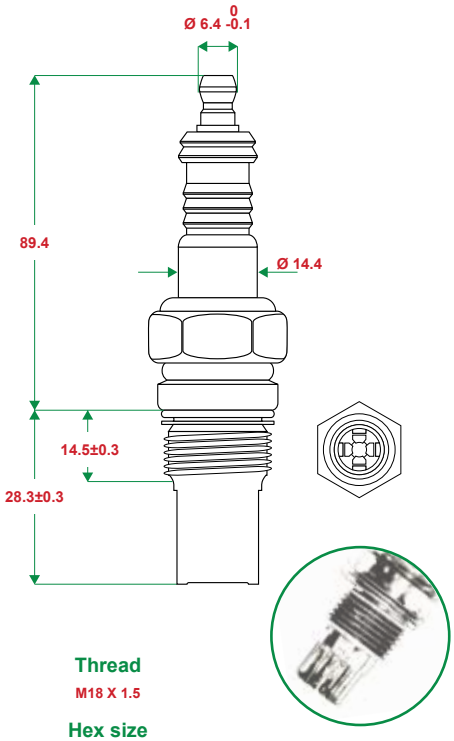

Thread
M18 X 1.5

Hex size
22.2 0 -0.33mm

Gap
0.3mm


Tightening Torque
with lubricant 30-35 Nm
no lubricant 35-45 Nm

Ground electrode: four-pointed / Ruthenium
Central electrode: single / Iridium
Flame diffuser

Cross Reference

JENBACHER	341015, 382195, 351000, 382195, 1233808
FEDERAL MOGUL	FBM80WPN
BERU	18GZ46
GOETZE	G-6001, G-6003

JP3IR

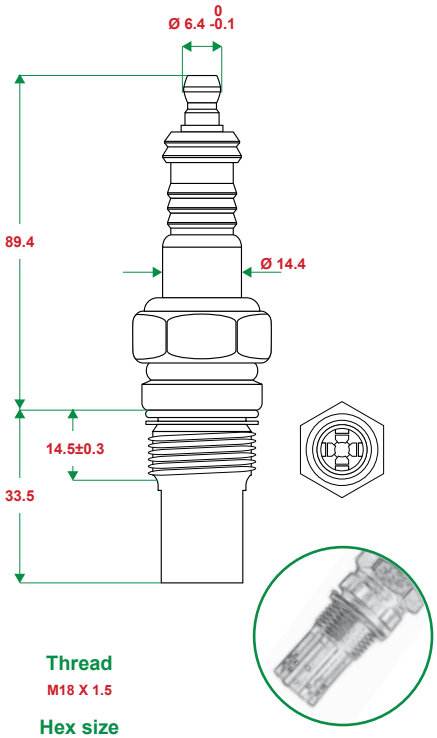

Thread
M18 X 1.5

Hex size
22.2 0 -0.33mm

Gap
0.3mm


Tightening Torque
with lubricant 30-35 Nm
no lubricant 35-45 Nm

Ground electrode: four-pointed / Ruthenium
Central electrode: single / Iridium
Flame diffuser

Cross Reference

JENBACHER	1233804, 190441, 314322 639754, 462203, 347257 401824, 462199, 639753
FEDERAL MOGUL	FB78WPN, FBM80WPNS
BERU	18GZ44, 18GZ47
GOETZE	G-6002

J558

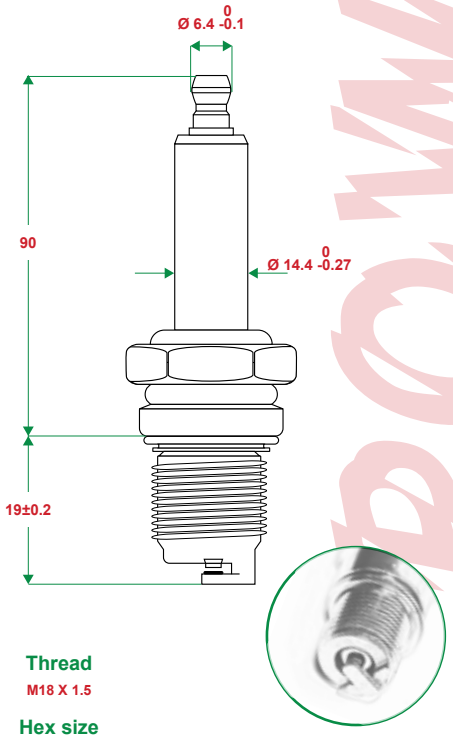

Thread
M18 X 1.5

Hex size
22.2 0 -0.4mm

Gap
0.3mm

Tightening Torque
with lubricant 30-35 Nm
no lubricant 35-45 Nm

Ground electrode: radial / Iridium
Central electrode: single / Iridium

Cross Reference

JENBACHER	436782, 1214569, 1205634 1205632, 1236100
DENSO	518
FEDERAL MOGUL	FW76WWCC
BERU	18GZ46
GOETZE	G-6004



enjoy high quality

Designed in EU

DISTRIBUTION
NRG Italy S.r.l.
nrgitaly.energy
MADE IN PRC

* Product features may change without notice

NRG Italy S.r.l. unipersonale - Via Luigi Pirandello 4/6 - 24030 Mapello (BG) - Italy

nrgitaly.energy

ACTIVE POWER